


Allan Deviation $\sigma_y(\tau)$

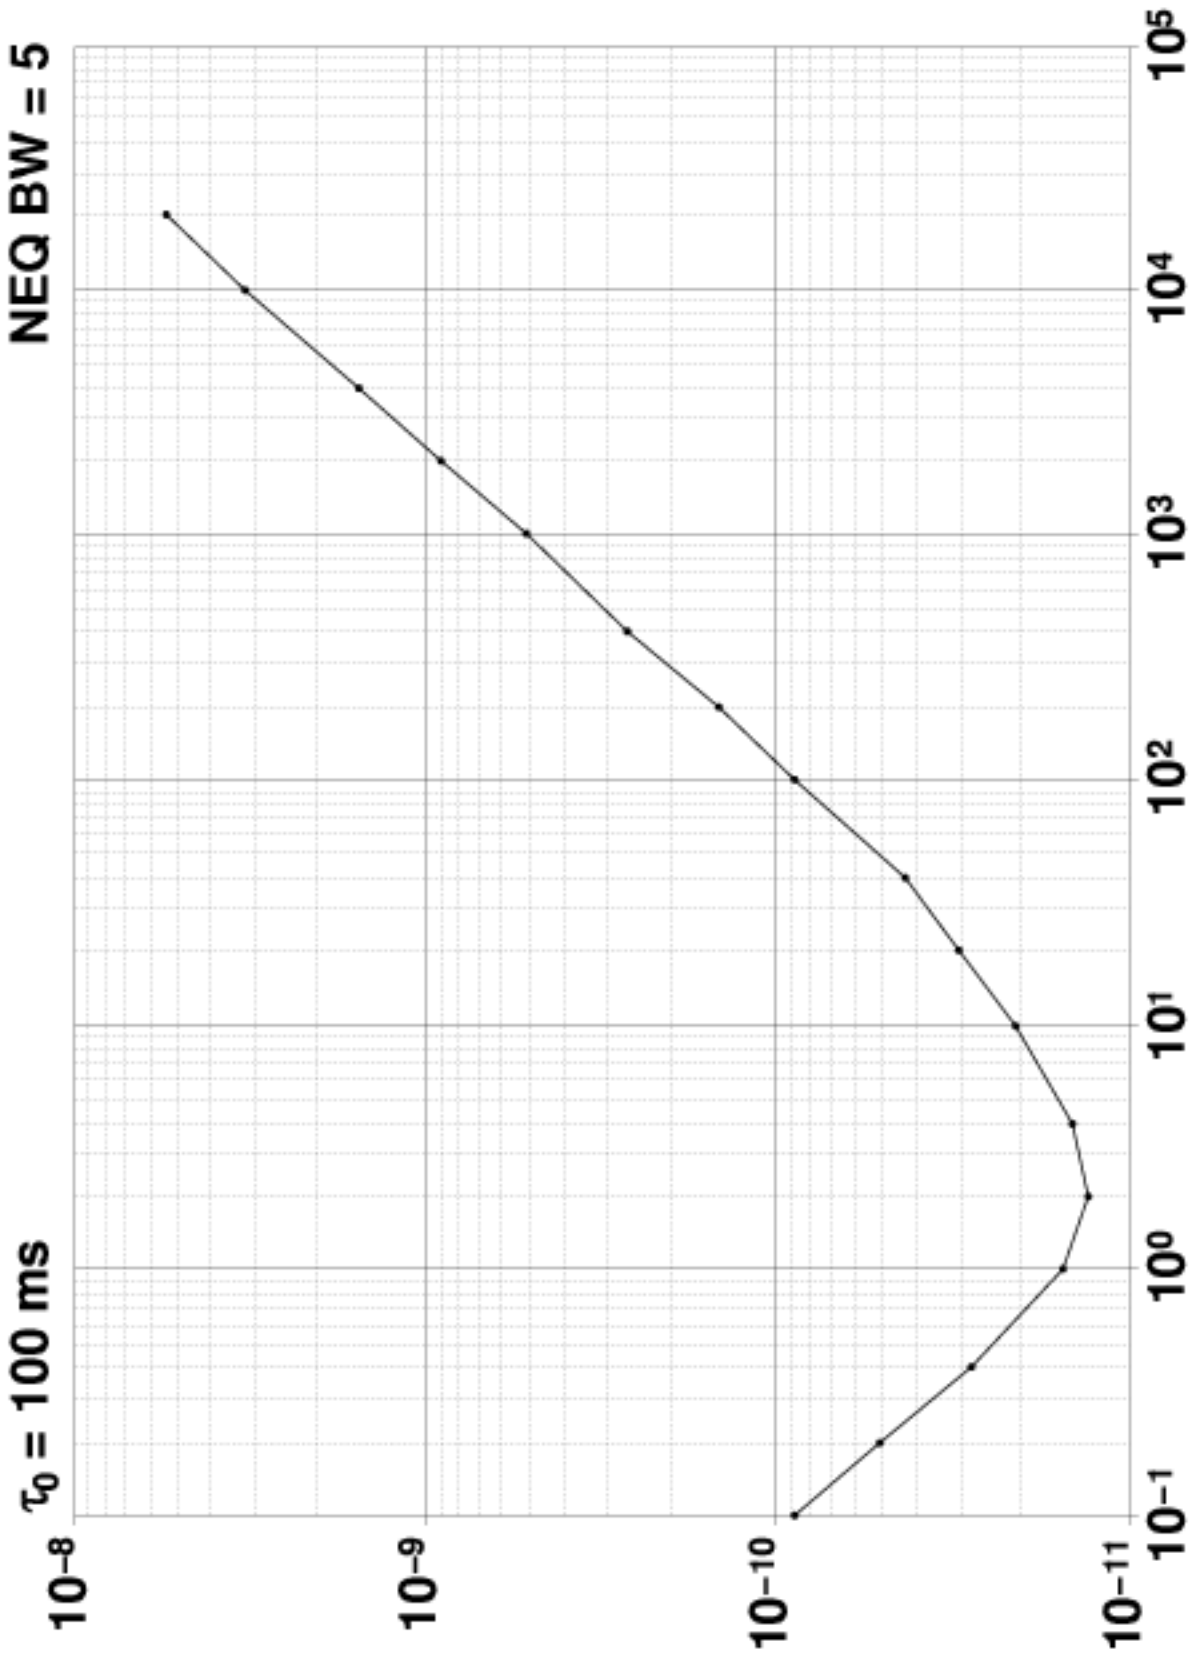

Input 10.0 MHz 6 dBm

Reference 5.0 MHz 11 dBm


Allan Deviation $\sigma_y(\tau)$

$\tau_0 = 100 \text{ ms}$	Avg. Time (s)	Allan Deviation $\sigma_y(\tau)$	NEQ BW = 5
	0.1	8.850×10^{-11}	
	0.2	5.142×10^{-11}	
	0.4	2.814×10^{-11}	
	1	1.529×10^{-11}	
	2	1.311×10^{-11}	
	4	1.460×10^{-11}	
	10	2.093×10^{-11}	
	20	3.045×10^{-11}	
	40	4.34×10^{-11}	
	100	8.89×10^{-11}	
	200	1.46×10^{-10}	
	400	2.63×10^{-10}	
	1000	5.1×10^{-10}	
	2000	9.0×10^{-10}	
	4000	1.53×10^{-9}	
	10000	3.2×10^{-9}	
	20000	5.4×10^{-9}	

Phase Difference

5.0x10⁻⁰⁷ s/div

Center: -1.024299x10⁻⁰³ s

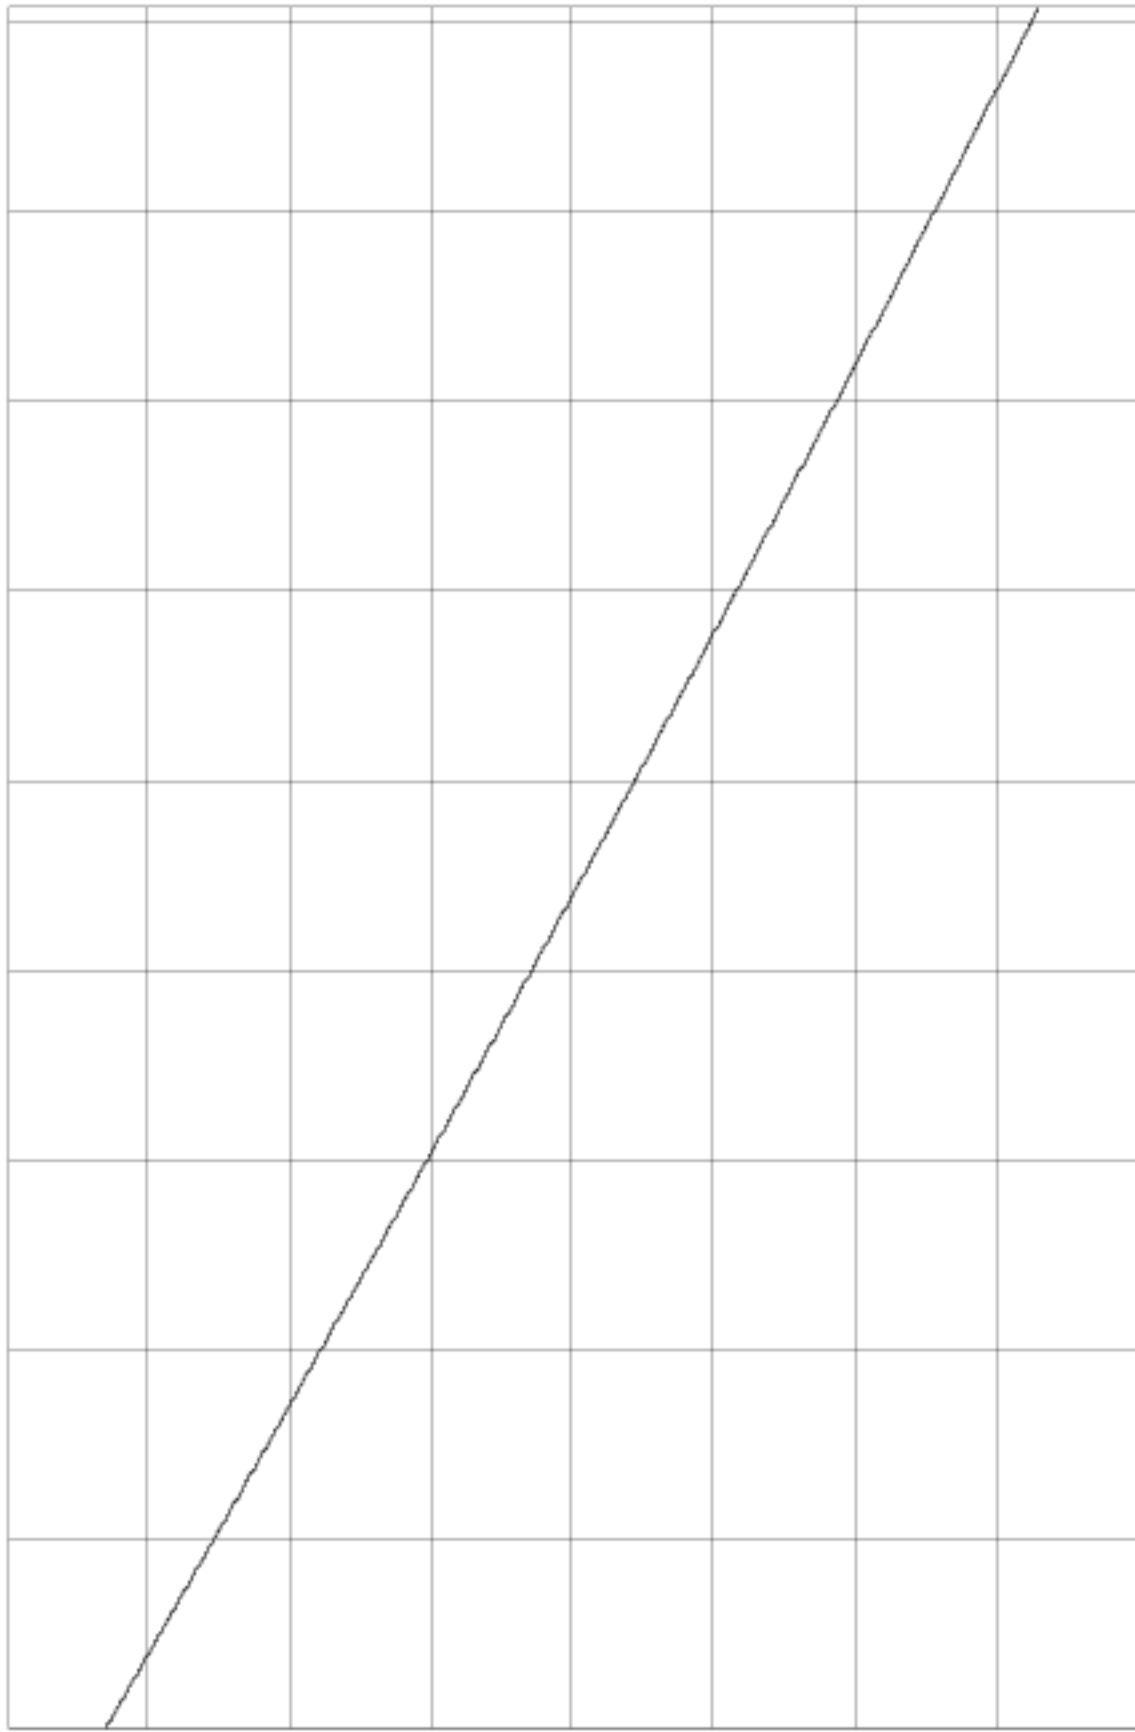

60s/div


Input 10.0 MHz 6 dBm

Reference 5.0 MHz 11 dBm

Frequency Difference

2.0x10⁻¹⁰ /div

Center: -6.015x10⁻⁰⁹

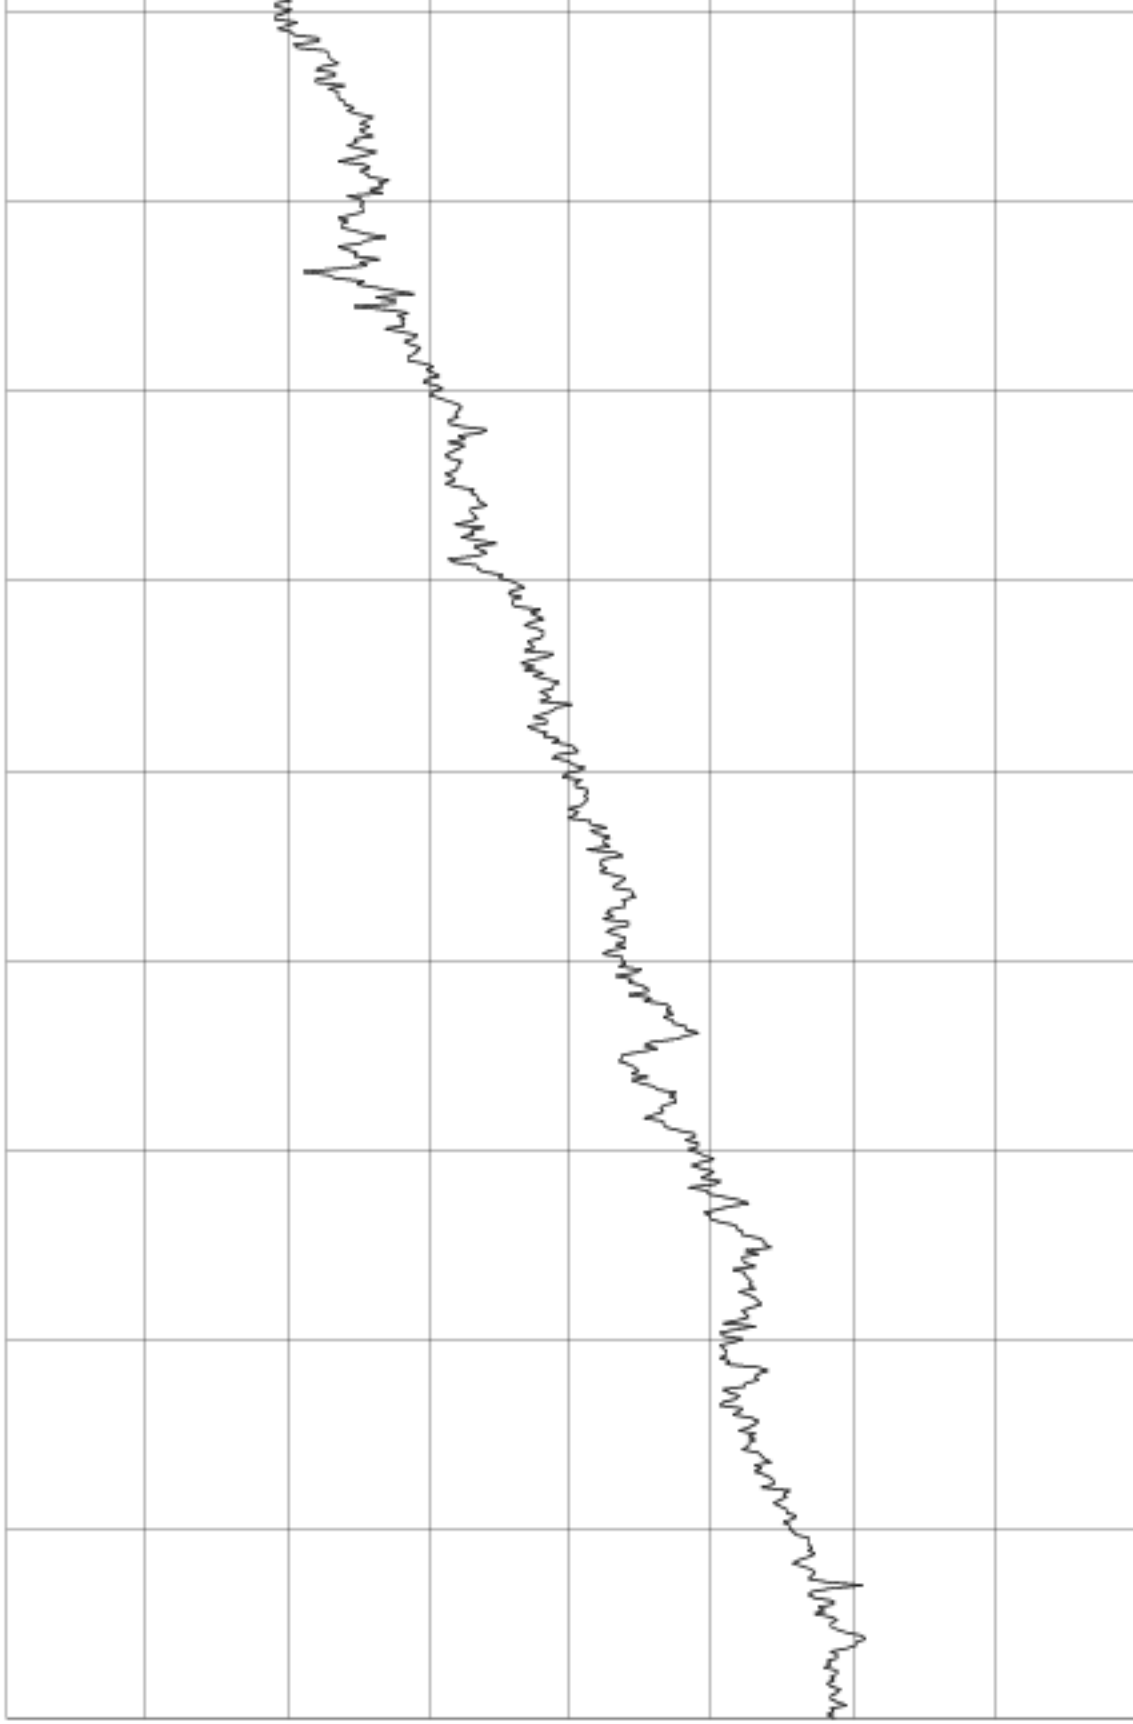

60s/div

Input 10.0 MHz 6 dBm

Reference 5.0 MHz 11 dBm

Frequency Counter


<u>Sample Time (s)</u>	<u>Frequency (MHz)</u>
1	10.0000007029834
10	10.00000070378138
100	10.000000704429622
1000	10.000000710969006

Reference Frequency: 5.0 MHz (auto)

$\mathcal{L}(f)$ Phase Noise at 10.0 MHz (dBc/Hz)

Mx: 1.000977 Hz Δ Mx: 99975.59 Hz Δ x: -99974.6
My: -76.0 dBc/Hz Δ My: -142.6 dBc/Hz Δ y: 66.6

20 dB/Div

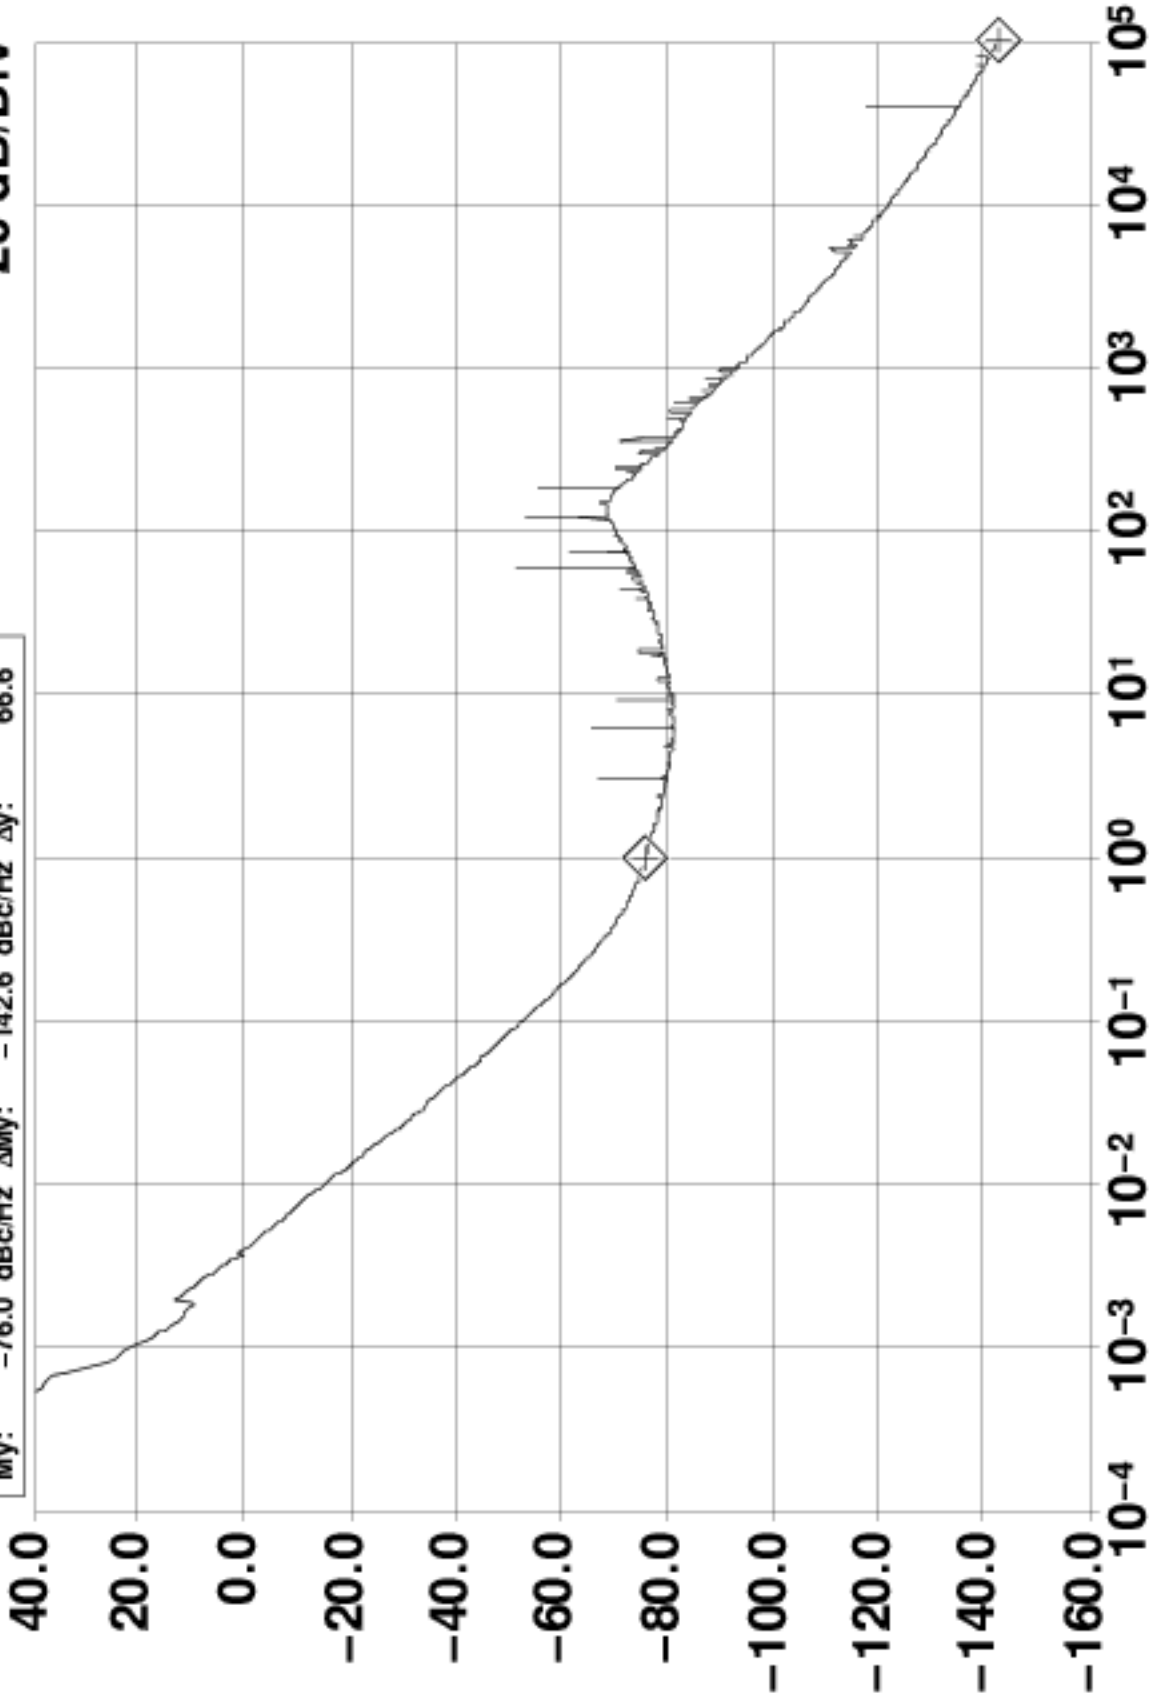

Input 10.0 MHz 6 dBm

Reference 5.0 MHz 11 dBm