


Allan Deviation $\sigma_y(\tau)$

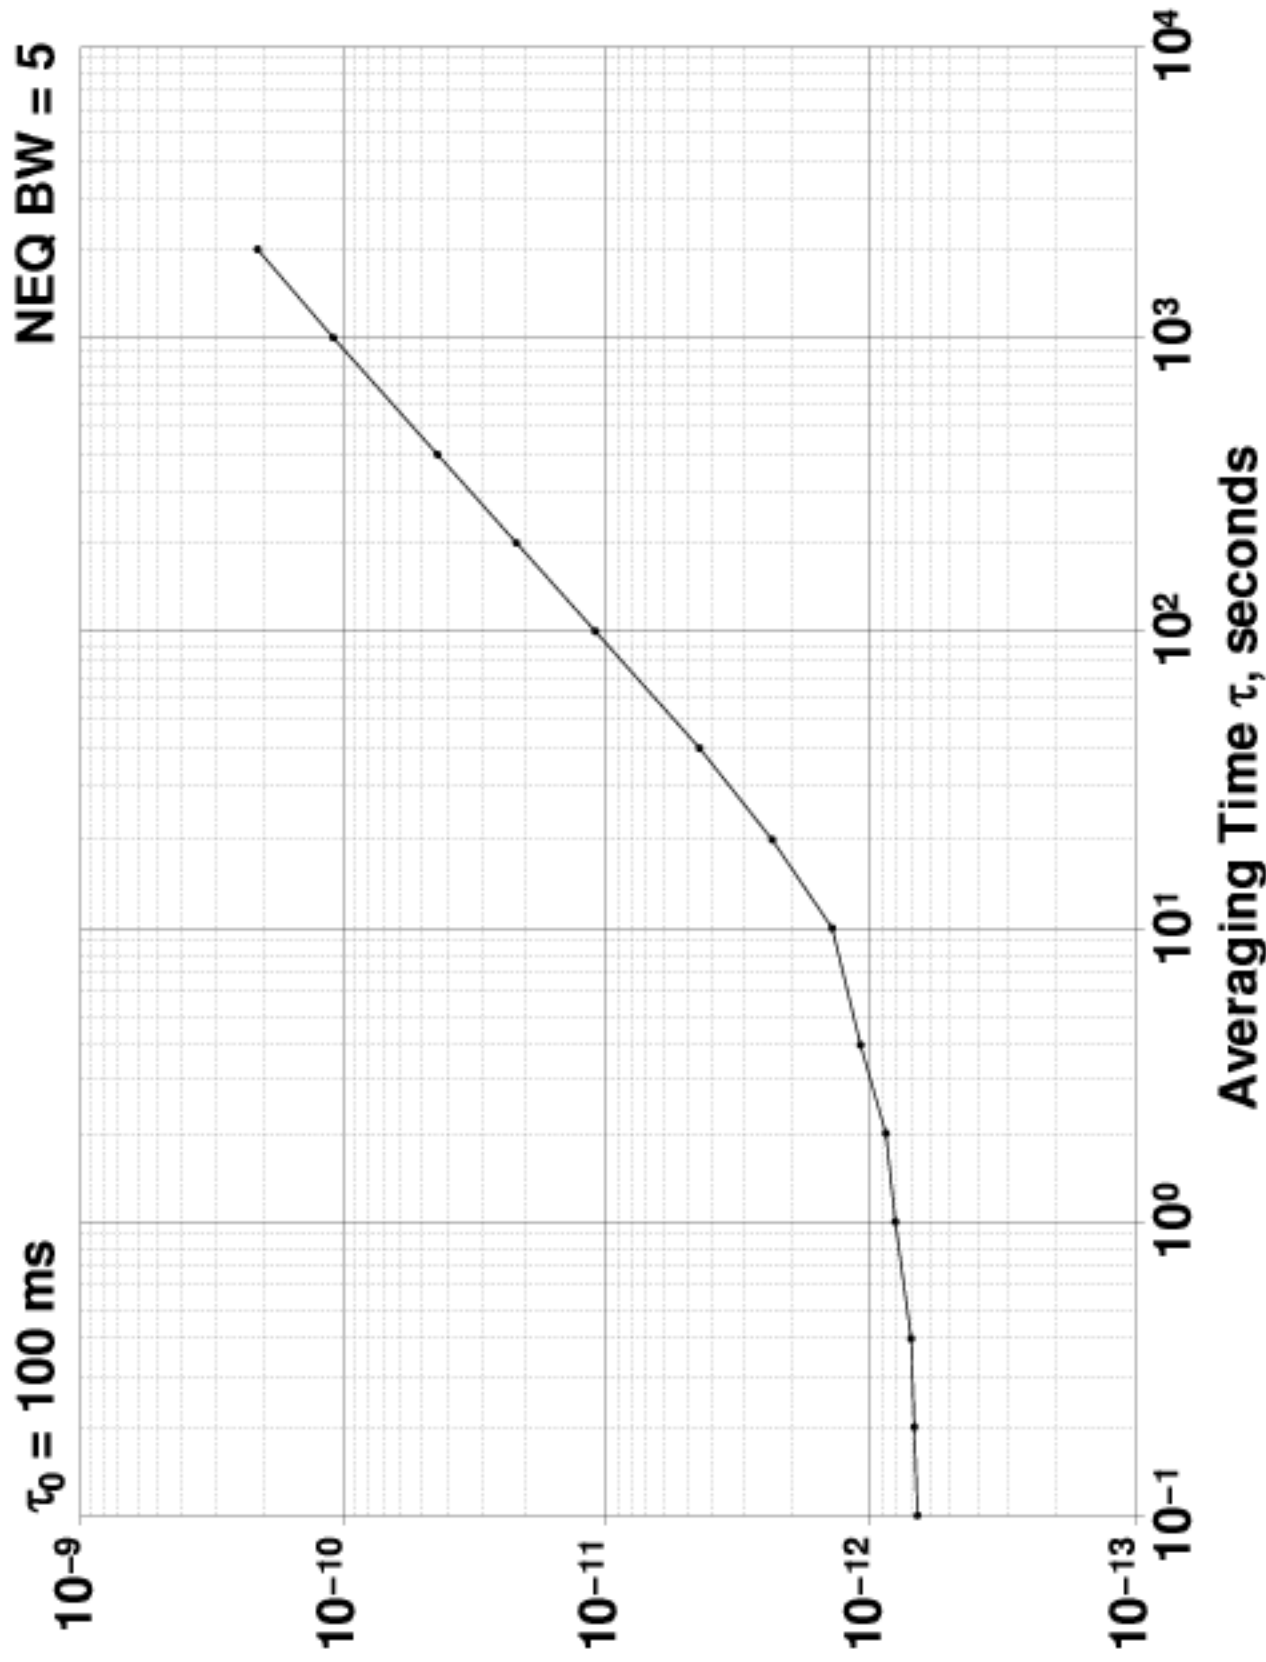

Input 10.0 MHz 1 dBm

Allan Deviation $\sigma_y(\tau)$

$\tau_0 = 100 \text{ ms}$	Avg. Time (s)	Allan Deviation $\sigma_y(\tau)$	NEQ BW = 5
	0.1	6.643×10^{-13}	
	0.2	6.845×10^{-13}	
	0.4	7.11×10^{-13}	
	1	8.04×10^{-13}	
	2	8.86×10^{-13}	
	4	1.094×10^{-12}	
	10	1.40×10^{-12}	
	20	2.37×10^{-12}	
	40	4.46×10^{-12}	
	100	1.10×10^{-11}	
	200	2.19×10^{-11}	
	400	4.3×10^{-11}	
	1000	1.07×10^{-10}	
	2000	2.1×10^{-10}	


17/03/2007 20:40:06
2h 0m

TSC 5120A

Phase Difference

8.0x10⁻⁰⁸ s/div

Center: -3.8254x10⁻⁰⁶ s

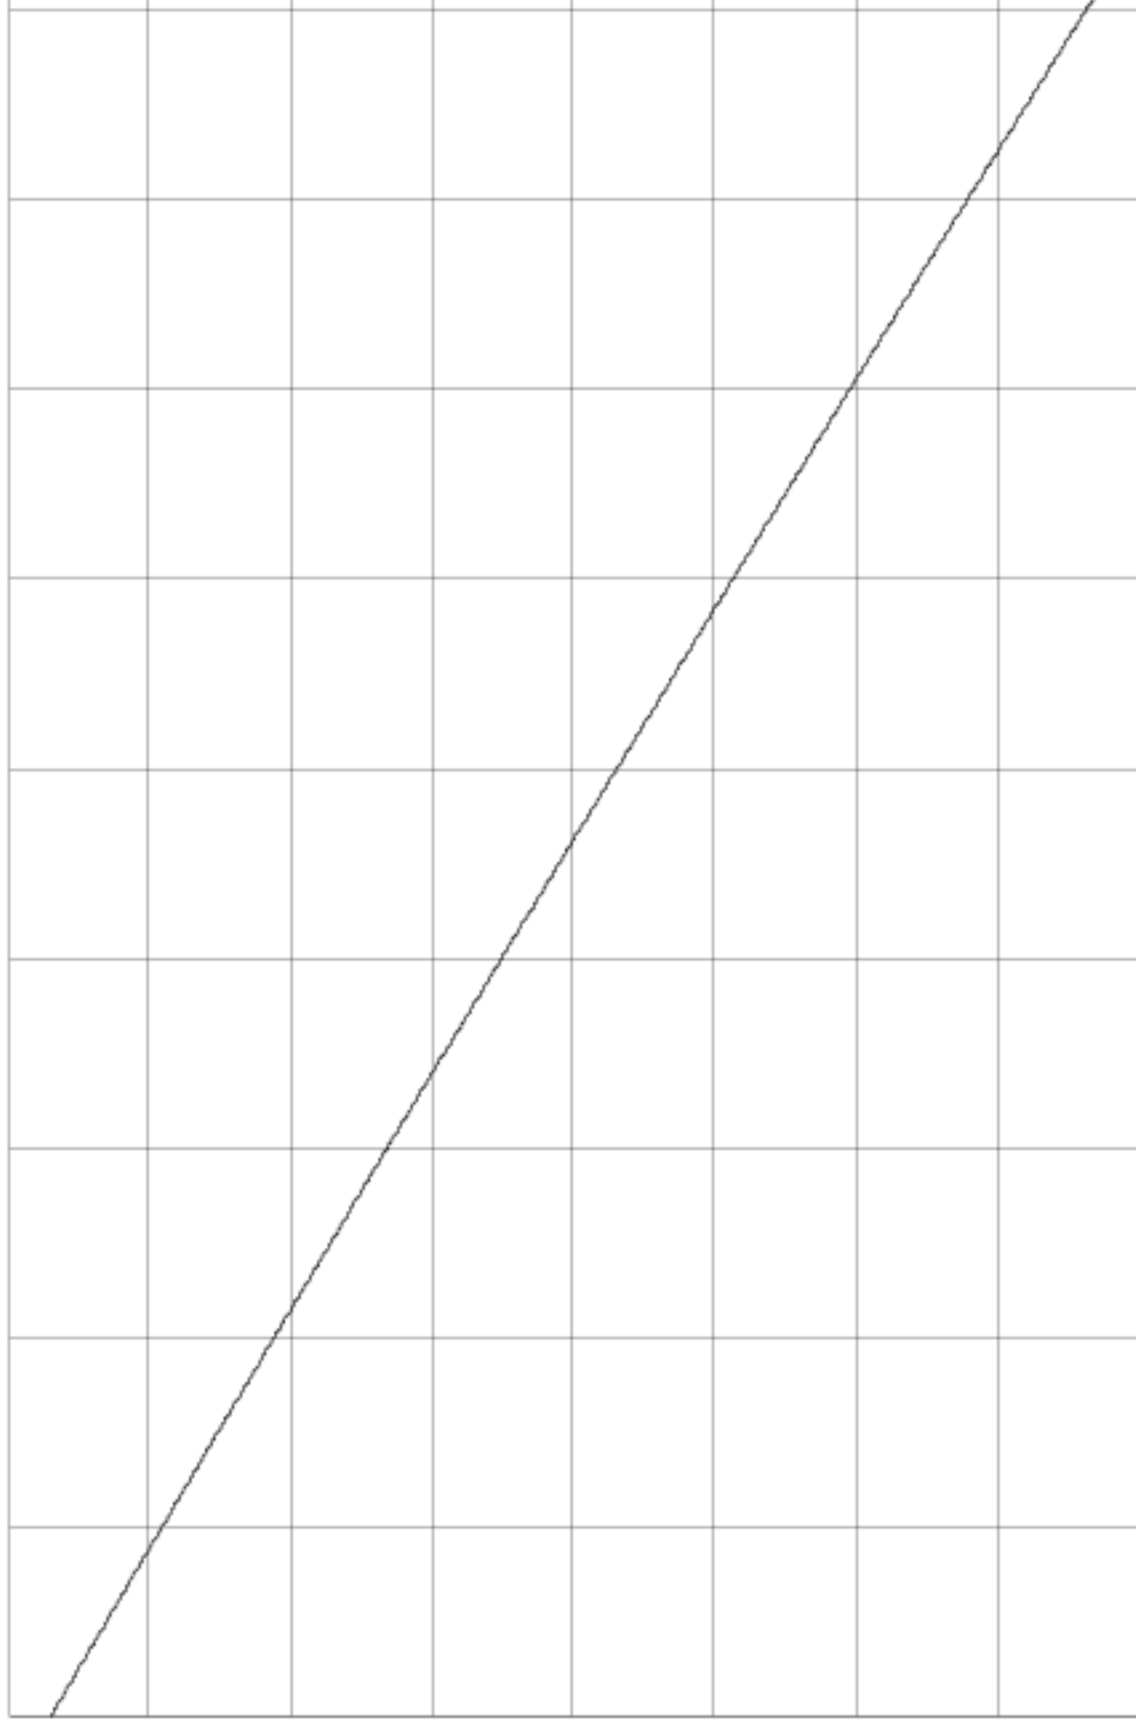

60s/div

Input 10.0 MHz 1 dBm

Reference 5.0 MHz 13 dBm


17/03/2007 20:40:06
2h 0m

TSC 5120A

Frequency Difference

2.0×10^{-11} /div

Center: -1.0815×10^{-9}

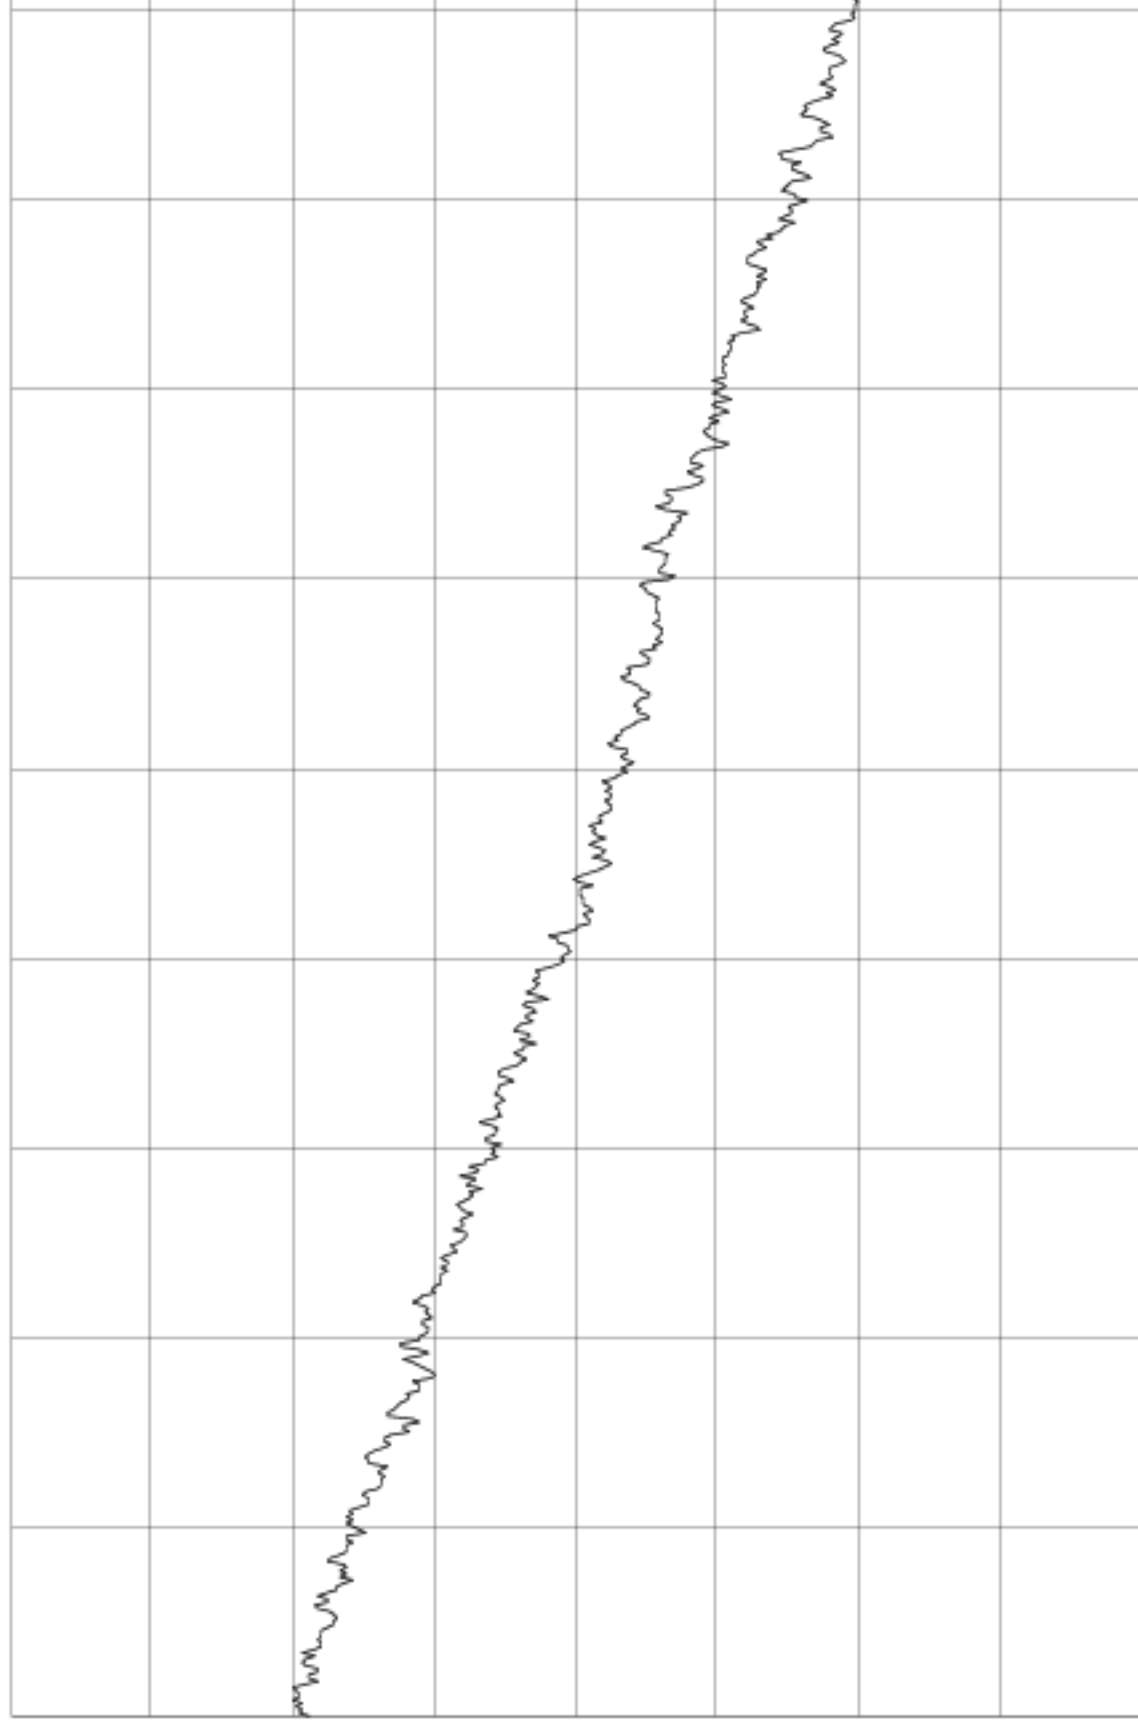

Input 10.0 MHz 1 dBm

Reference 5.0 MHz 13 dBm


Frequency Counter

Sample Time (s)	Frequency (MHz)
1	9.9999999196225
10	9.99999991963614
100	9.999999919572910
1000	9.999999918939797

Reference Frequency: 5.0 MHz (auto)

$\mathcal{L}(f)$ Phase Noise at 10.0 MHz (dBc/Hz)

25 dB/Div

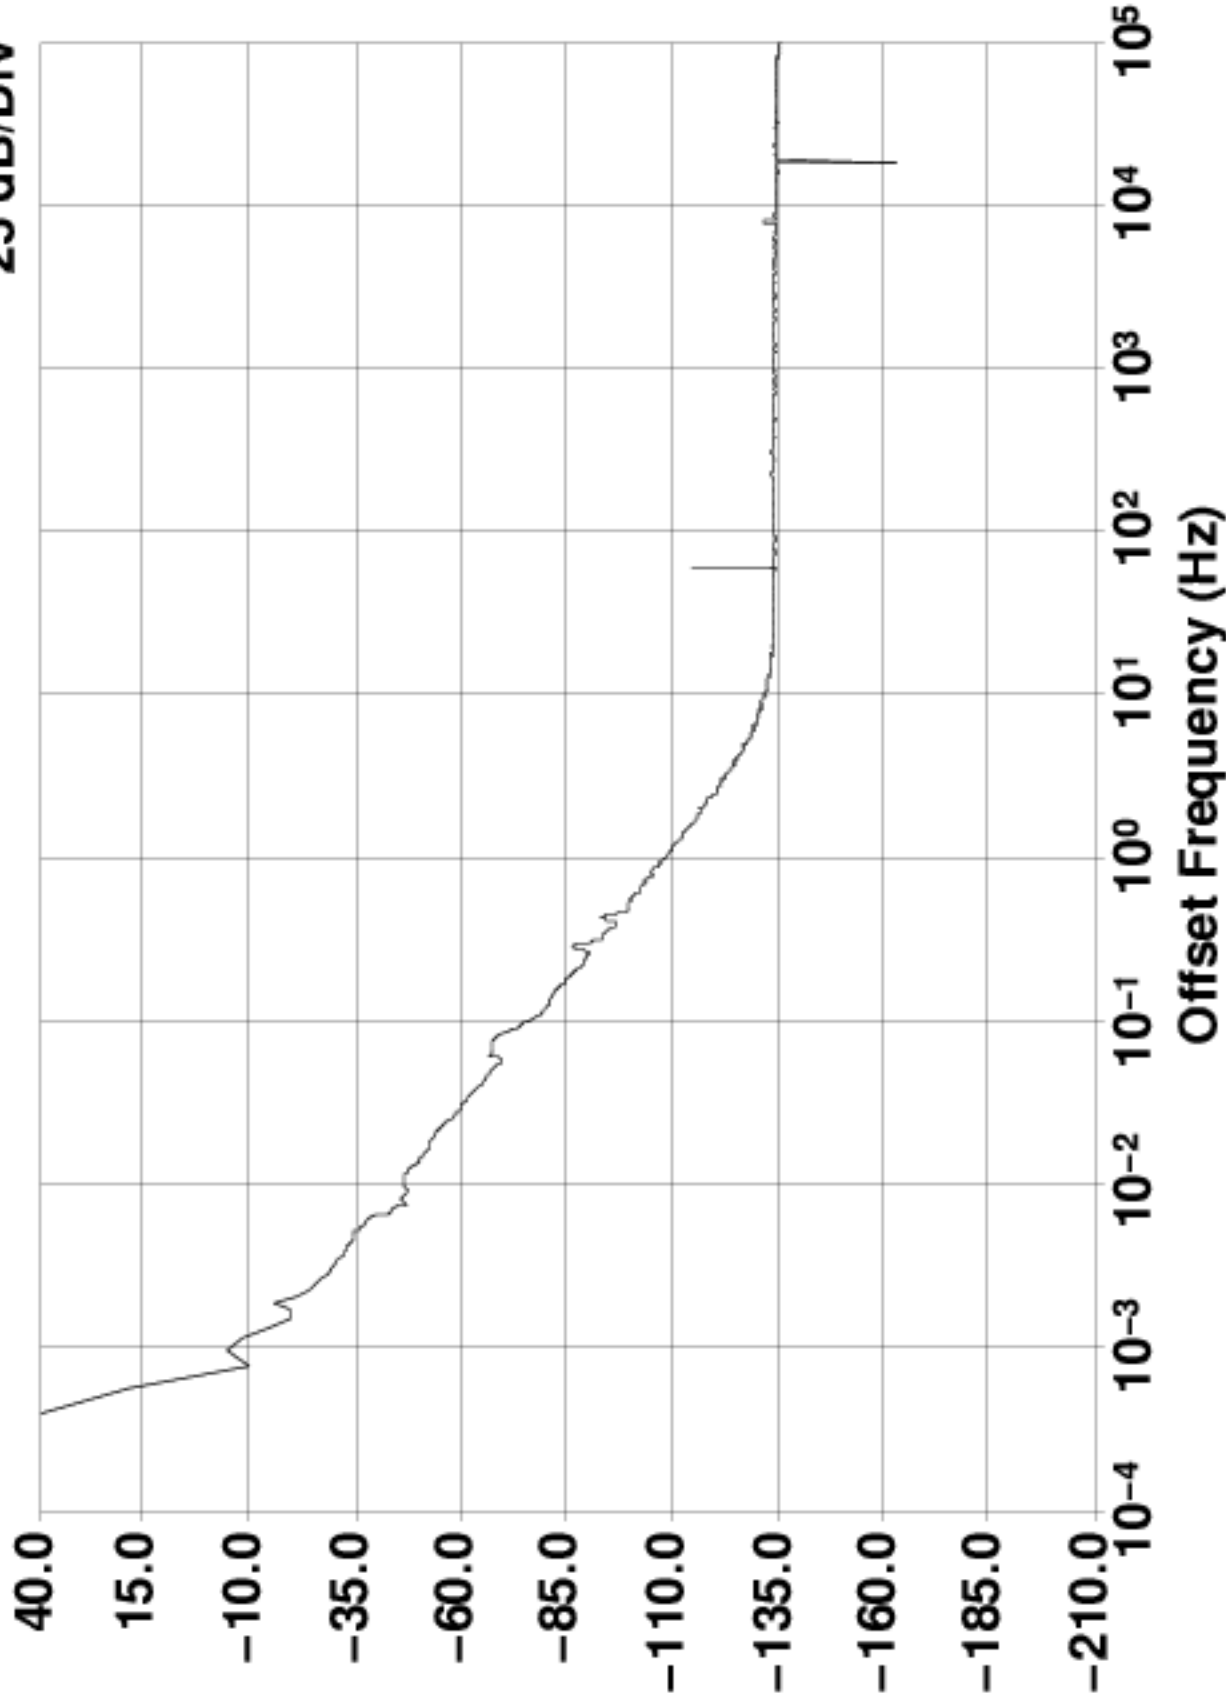

Input 10.0 MHz 1 dBm

Reference 5.0 MHz 13 dBm