

50Ω High Output 1 to 100 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input Power	50mW
Peak IF current	20mA

Pin Connections

RF REF (RF2)	8
RF IN (RF1)	1
DC OUT (I)	3,4
GROUND	2,5,6,7
CASE GROUND	2

Outline Drawing

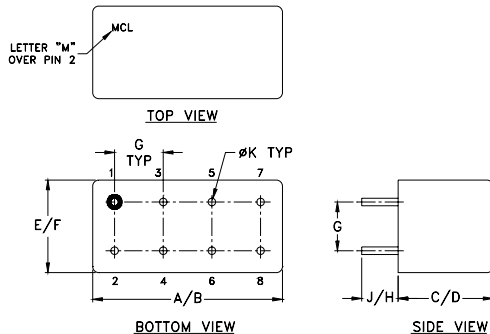

Outline Dimensions (inch/mm)


A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Features

- wideband, 1 to 100 MHz
- hermetic case
- low DC offset, 0.2 mV typ.
- high DC output, 1000 mV typ.

Applications

- monitoring circuits
- leveling circuits
- PLL



CASE STYLE: A01

PRICE: \$20.70 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Phase Detector Electrical Specifications

FREQUENCY (MHz)	POWER IN	SCALE FACTOR	IMPEDANCE (ohms)	ISOLATION (dB)	OUTPUT POLARITY	DC OUTPUT (mV)	FIGURE OF MERIT
RF1 RF2	RF1 RF2 (dBm)	mV/deg.	Output Load I	RF1/RF2 Min.	RF1/RF2 In-Phase	Max. Offset Typ. Min. Typ. Max.	Typ.
1-100	DC-50	7	8	500	40	neg.	1000 700 0.2 1 143

DC output decreases to 550mV over 1-10 MHz as temperature decreases to -55°C

Typical Performance Data

Frequency (MHz)	DC Output mV	DC Offset mV	RF1-RF2 Isolation (dB)
	$\bar{X}$ σ	$\bar{X}$ σ	$\bar{X}$
1.00	-769.98 14.85	0.10 0.16	76.12
5.00	-830.34 8.90	0.11 0.18	75.09
8.07	-840.24 14.44	0.11 0.18	74.07
10.00	-843.71 14.61	0.10 0.18	73.19
15.14	-851.12 17.01	0.11 0.19	70.19
20.00	-859.20 18.91	0.11 0.19	68.10
22.21	-861.26 20.52	0.10 0.20	67.28
29.29	-872.02 22.55	0.11 0.21	65.14
36.36	-881.57 24.77	0.11 0.22	63.29
40.00	-886.86 25.39	0.12 0.23	62.38
43.43	-889.93 26.41	0.12 0.23	61.76
50.50	-917.82 25.99	0.14 0.25	60.51
57.57	-927.50 28.69	0.15 0.27	59.35
60.00	-917.14 33.08	0.15 0.26	59.18
64.64	-920.62 38.60	0.15 0.27	58.73
71.71	-925.22 45.18	0.17 0.31	57.82
78.79	-928.03 51.83	0.18 0.31	57.35
85.86	-932.34 57.31	0.17 0.31	57.15
92.93	-932.98 60.65	0.18 0.38	56.93
100.00	-909.17 74.27	0.23 0.43	56.36

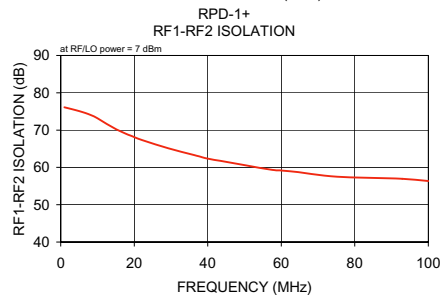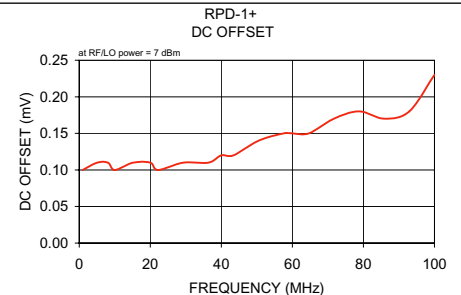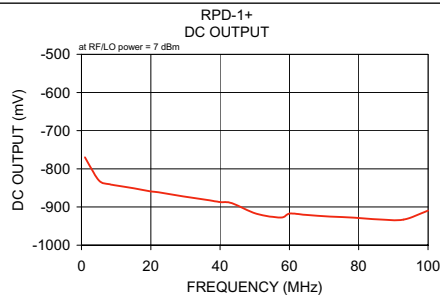

electrical schematic

